


## Colors



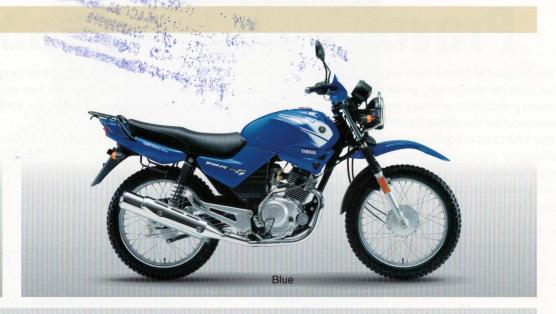

## **Specifications**

Engine	
Engine type	Air-cooled, 4-stroke, SOHC, 2-valve
Cylinder layout	Single cylinder
Displacement	124 cm <sup>3</sup>
Bore x stroke	54.0 × 54.0 mm
Compression ratio	10.0:1
Maximum horsepower	7.4 kW (10.1 PS) / 7,800 r/min
Maximum torque	9.5 N·m (1.0 kgf ·m) / 6,500 r/min
Starting system	Electric start and kick start
Lubrication	Wet sump
Clutch type	Wet, multiple-disc
Ignition system type	CDI (Capacitor Discharge Ignition)
Fuel supply	Carburetor
Primary / Secondary reduction ratio	3.400 (68/20) / 3.214 (45/14)
Transmission type	Constant mesh, 5-speed

Dimensions	
Overall length × width × height	2,015 mm × 755 mm × 1,090 mm
Weight (with oil and a full fuel tank)	124 kg
Wheelbase	1,300 mm
Minimum ground clearance	165 mm
Fuel tank capacity	12.0 L
Engine oil capacity	1.2 L
Seat height	790 mm

Frame type	Diamond	
Caster angle / Trail	27°20′ / 102 mm	Ш
Suspension type (front/rear)	Telescopic fork / Swingarm	
Brake type (front/rear)	Drum / Drum	
Tire size (front/rear)	3.0-18 47P / 3.0-18 47P	
Battery	12M5S-3B / 12V 5.0 Ah (10HR)	
Headlight	Halogen bulb 12V, 35/35W x 1	HI
Brake / Taillight	12V, 21/5W × 1	
Turn signal lights (front/rear)	12V, 10W × 2	





Colors shown may not match with the actual color due to printing limitations.

The specifications and design of motorcycles here may vary according to requirements and are subject to change without prior notice





YAMAHA MOTOR CO., LTD. 2500 SHINGAI IWATA SHIZUOKA JAPAN Printed in Japan