


# WATER PUMPS

**T o m o r r o w ' s P o w e r N o w !**



**YP20G**

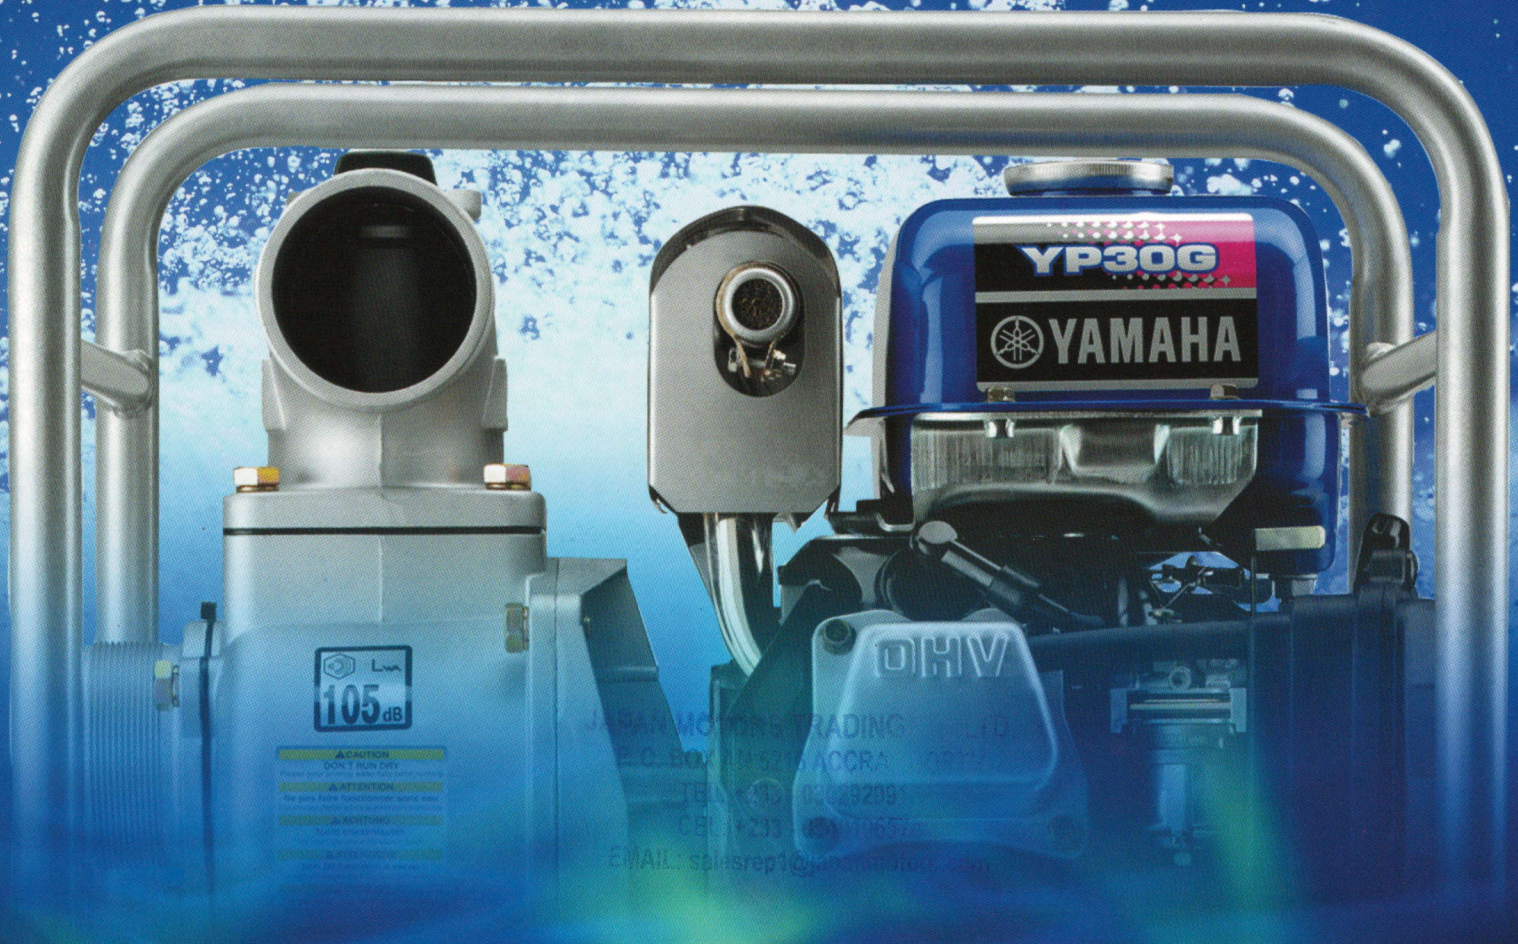

**YP30G**



Tomorrow's Power Now!

# YP20G



# YP30G



## DEPENDABLE POWER, MAXIMUM EFFICIENCY, YAMAHA QUALITY.

### Adjustable Throttle Lever



An easy-to-operate adjustable throttle lever is provided to vary and maintain engine speed. Adaptable to any situation, it can help reduce noise and increase fuel consumption efficiency.

### Reliable Performance

The YP20G and YP30G use a high-power engine. This allows them to work hard for you in various fields. In addition, the well-balanced design and precision construction result in significant reductions in gasoline and oil consumption. This gives the YP20G and YP30G excellent cost-performance.

### Compact and Lightweight

Yamaha's advanced technology is reflected in this compact and lightweight design. The use of special aluminum die-cast alloy makes the body lightweight for greater ease during transport while also contributing to outstanding durability.

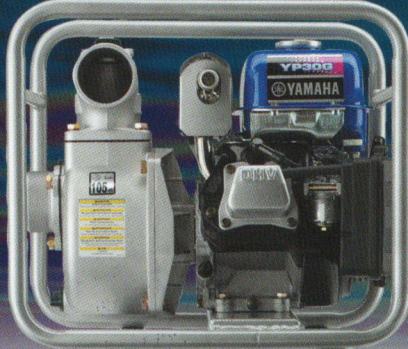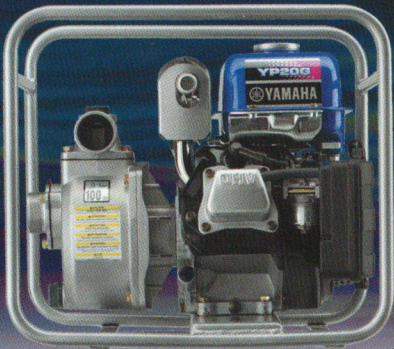


**YP20G**  
Standard  
Accessories



**YP30G**  
Standard  
Accessories



### Pumping Capacity (L/min)

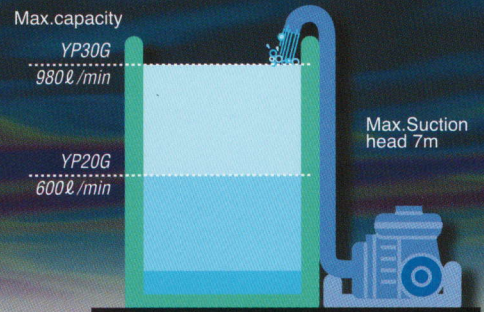


### Specifications


Model	YP20G	YP30G
<b>PUMP</b>		
Suction port dia	2 inches	3 inches
Discharge port dia	2 inches	3 inches
Connection Thread	Outer Pipe Thread	Outer Pipe Thread (Fire Fighting Hose Coupling Thread)
Total head	30m	31m
Max. suction head	7m	7m
Max. capacity	600 L/min	980 L/min
<b>ENGINE</b>		
Type	4-stroke, OHV, forced air cooled	4-stroke, OHV, forced air cooled
Displacement	123cc	171cc
Max. output	4.0ps/4,000rpm	5.5ps/4,000rpm
Fuel	Unleaded gasoline	Unleaded gasoline
Fuel tank capacity	4.5 L	4.5 L
Starting system	Recoil starter	Recoil starter
<b>DRY WEIGHT</b>	27kg	30kg
<b>DIMENSIONS</b>	391x502x454mm	397x518x466mm

### Performance Curve

#### YP20G

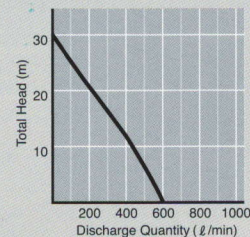

#### YP30G

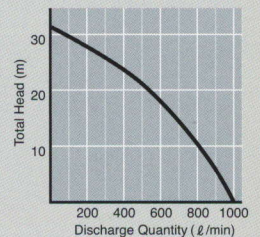

- Specifications are subject to change without notice.
- The listed information is the manufacturer's minimum guaranteed figures.



**JAPAN MOTORS TRADING CO. LTD.**  
P. O. BOX AN 5216 ACCRA - NORTH  
TEL: +233 - 0302929915  
FAX: +233 - 0540106574  
EMAIL: salesrep1@japanmotors.com



YAMAHA MOTOR POWERED PRODUCTS CO.,LTD.  
200-1 SAKAGAWA KAKEGAWA SHIZUOKA 436-0084, JAPAN  
Printed in Japan 339253 -1003OGD20-a1